# Defying Lunar Dust: A Revolutionary Helmet Design to Safeguard Astronauts' Health in Long-Term Lunar Habitats

Christopher Salvino[1], Kenneth Altshuler[2], Paul Beatty[3], Drew DeJarnette[4], Jesse Ybanez[5], Hazel Obana[6], Edwin Osabel[7] and Andrew Dummer[8]
*Lunar Helium-3Mining, Scottsdale, AZ, 85260, USA*

Eric Lutz[9] and Moe Momayez[10]
*University of Arizona, Tucson, AZ, 85721, USA*

**Lunar dust remains one of the most critical unresolved challenges to long-duration lunar missions. Its sharp, abrasive, and electrostatically charged particles are easily inhaled and can penetrate deep into the lungs, reaching the bloodstream and the brain. Despite airlocks and HEPA filtration systems, dust will inevitably infiltrate lunar habitats and threaten astronaut health. We present a novel patent protected helmet design. This system uses a multilayered, synergistic mitigation approach combining mechanical and electrostatic defenses. The mechanical system delivers HEPA-filtered, ionized air across the user's face, while the electrostatic barrier repels charged particles away from the respiratory zone. These two systems work together to prevent dust from entering the user's breathing space. Designed for use inside lunar habitats, this helmet represents a potential solution to an unaddressed, life-threatening problem. It allows astronauts to eat, talk, and sleep while maintaining a protected respiratory zone and provides targeted inhalation-level protection in an environment where dust exposure is otherwise unavoidable.**

## I. Nomenclature

$Fe^0$ = Nanophase metallic iron
FeO = Iron (II) oxide
HEPA = High-Efficiency Particulate Air
PAPR = Powered Air-Purifying Respirator
μm = Micrometer ($1 \times 10^{-6}$ meters)

[1] CEO and Chief Engineer, Lunar Helium-3 Mining, LLC and PhD Candidate, College of Engineering Mining & Geological Engineering, University of Arizona.
[2] Patent Attorney, Lunar Helium-3 Mining, LLC
[3] Thermodynamics Engineer, Lunar Helium-3 Mining, LLC.
[4] Systems Engineer, Lunar Helium-3 Mining, LLC.
[5] Mechanical Engineer, Lunar Helium-3 Mining, LLC.
[6] Business Director, Lunar Helium-3 Mining, LLC.
[7] Electrical Engineer, Lunar Helium-3 Mining, LLC.
[8] Physicist, Lunar Helium-3 Mining, LLC.
[9] Adjunct Lecturer of Mining and Geological Engineering, College of Engineering Mining & Geological Engineering, University of Arizona.
[10] Professor of Mining Geological Engineering, College of Engineering Mining & Geological Engineering, University of Arizona.

## II. Introduction

The return to the Moon under NASA's Artemis program and other international initiatives marks the beginning of a new era in space exploration—one focused on sustained lunar presence rather than short-duration flag-and-footprint missions. Plans for extended lunar habitation, in-situ resource utilization (ISRU), and surface-based research operations require that astronauts live and work for weeks to months inside pressurized habitats on the Moon.

However, one of the most persistent and unsolved threats from the Apollo era remains: lunar dust. Known technically as regolith, this material is unlike anything on Earth. It is composed of sharp, jagged, and highly adhesive particles that cling to suits, tools, and surfaces. Once inside a habitat, it becomes nearly impossible to eliminate. Astronauts who flew on Apollo missions consistently reported how the dust permeated every surface, resisted removal, and caused irritation.

Gene Cernan, commander of Apollo 17, described the challenge clearly: *"I was covered with it. You couldn't avoid it. It was in my eyes, in my nose, and in my mouth. It was like fine sandpaper, and it was a real problem... You had to be careful not to inhale it."* [1], as shown in Fig. 1.

**Fig. 1 Gene Cernan inside the Apollo 17 Lunar Module after EVA, visibly covered in lunar dust. Image source: NASA, public domain.**

Harrison Schmitt, the only geologist to walk on the Moon, referred to the experience as "lunar hay fever," citing sneezing, sore throat, and eye irritation [2].

Despite modern improvements—such as airlocks, suit brushing systems, and HEPA filtration—lunar dust is still expected to infiltrate future habitats by clinging to EVA suits, tools, and equipment surfaces. Once inside, this dust can be dislodged from clothing, gear, and other surfaces through normal movement and airflow, leading to re-aerosolization. The Moon's low gravity makes it easier for fine particles to become and remain airborne once disturbed, and the absence of weathering ensures that the dust remains sharp, mobile, and highly adhesive - partly due to its iron content and magnetic properties [3].

The health risks posed by lunar dust are not merely theoretical. The most critical threat is inhalation, as illustrated conceptually in Fig. 2. While NASA and other space agencies have prioritized mitigation strategies such as dust-resistant coatings, electrodynamic shields, and advanced airlock systems, these efforts primarily focus on protecting equipment or reducing dust entry into habitats. In contrast, far less attention has been devoted to protecting astronauts once dust is already inside the habitat. This lack of targeted, point-of-inhalation protection represents a significant operational and biomedical gap that must be addressed before long-duration missions can be safely conducted.

**Fig. 2 Conceptual illustration of lunar dust depicted as an animated character, highlighting inhalation risk in a visual format. Image source: AI-generated by authors.**

This paper proposes a novel respiratory personal protective device specifically designed to mitigate inhalation of lunar dust within habitats.

## III. Lunar Dust Characteristics and Environmental Behavior

Lunar dust, or regolith, presents a unique and persistent hazard that is fundamentally different from terrestrial dust. Unlike Earth-based particles, which are rounded over time by wind and water erosion, lunar dust has been formed and fractured by micrometeorite impacts in an airless environment. As a result, the particles retain sharp edges and highly irregular shapes, with spiculated and fractured geometries that persist over geologic timescales.

Lunar regolith is composed of fine, silica-rich grains, many of which are smaller than 50 micrometers, with a significant portion below 10 micrometers in diameter. These respirable-sized particles are the most concerning from a health perspective, as they are capable of bypassing upper respiratory defenses and depositing themselves into the lower lungs [4]. Fig 3 illustrates the particle size distribution of lunar regolith, emphasizing the high proportion of submicron particles and the limitations of current filtration technologies, including cloth masks, N95s, HEPA filters, and PAPRs.

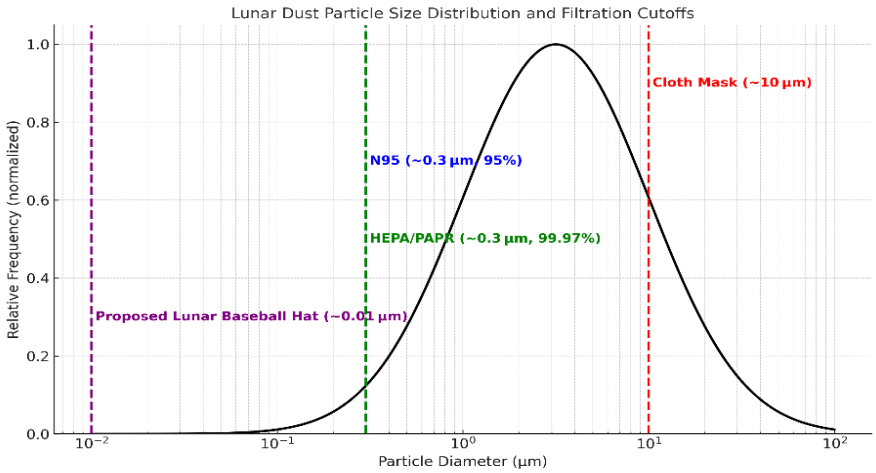


**Fig. 3 Lunar dust particle size distribution overlaid with filtration cutoffs for standard respiratory protection systems. Vertical dashed lines show approximate filtration limits for cloth masks (~10 µm), N95 respirators (~0.3 µm, 95% efficiency), HEPA filters and PAPRs (~0.3 µm, 99.97% efficiency), and the proposed Lunar Baseball Hat (~0.01 µm). The Baseball Hat threshold is conceptual, based on the system's combination of HEPA filtration, ionization, and electrostatic repulsion. The dominance of submicron particles in lunar dust highlights the need for inhalation-level protection beyond conventional filtration methods. Image created by authors.**

A major complicating factor in lunar dust behavior is its electrostatic charge. On the lunar surface, particle charging is driven primarily by exposure to ultraviolet (UV) radiation and the solar wind. During daytime at the lunar equator and other sunlit regions, UV radiation induces photoemission, which causes dust particles and surface materials to become positively charged. At night, or in regions shielded from the Sun, photoemission ceases, and solar wind electrons dominate, resulting in the accumulation of negative charge. This effect is especially pronounced in permanently shadowed regions such as polar craters, where solar wind electrons can accumulate without interruption, producing sustained negative surface charging. Additionally, triboelectric charging from friction—caused by astronaut movement, tool contact, or mechanical operations—may further alter dust charge inside habitats, particularly after regolith has been tracked indoors.

Once dust particles enter a habitat, they are no longer exposed to these environmental charging mechanisms. Over time, charges may dissipate or shift due to contact with internal surfaces, airflow, or environmental conditions such as humidity. As a result, it is hypothesized that dust within the habitat may exist as a mixed-charge population, including positively charged, negatively charged, and neutral particles. Although this internal charge distribution has not been directly measured, it presents a credible operational concern that complicates the design of mitigation systems, as no single electrostatic method can effectively repel all charge states.

In addition to its shape and charge, lunar dust contains significant iron content. Internally, typical lunar regolith includes approximately 5–15% total iron, primarily as iron oxide (FeO) [5]. Externally, nanophase iron ($Fe^0$) is formed through micrometeorite impacts at the particle surface. The combination of embedded and surface iron gives lunar dust both magnetic properties and enhanced adhesion, especially when interacting with electrostatic or magnetic fields, as shown in Fig. 3. The motion and adhesion behavior of lunar dust particles is influenced by a range of physical forces, each arising from specific particle characteristics such as shape, charge, surface energy, and magnetic content. These include both dominant and secondary forces that contribute to dust mobility and surface interaction under lunar conditions, as summarized in Table 1.

**Table 1 Forces acting on lunar dust particles. Adapted from NASA TP-2006-213726 [2].**

| Forces Acting on Lunar Dust Particles | | | | |
|---|---|---|---|---|
| **Force** | **Definition** | **Size** | **Key Notes** | **Lunar Importance** |
| Van der Waals | Weak attractive forces between molecules due to temporary dipoles | <10 microns | Strength ↑ as particles ↓ in size | Dominates adhesion between particles and surfaces |
| Electrostatic | Caused by charge accumulation from solar wind or friction | <20 microns | Cause particles to levitate, repel, or adhere to charged surfaces | Most critical for dust movement and surface adhesion |
| Cohesive | Intermolecular forces between close particles | <50 microns | Enhanced by irregular shapes of lunar dust | Contributes to particle clumping |
| Adhesion | Combination of van der Waals, electrostatic, and chemical bonding at surfaces | 1–10 microns | Strongest due to high surface area-to-volume ratio | Essential for understanding dust attachment to equipment |
| Gravity | Proportional to mass, acts on all particles | Minimal effect on <1 micron | Gravity affects all particles, including sub-micron dust. However, in low gravity and vacuum, settling is slow and electrostatic forces often dominate. | Gravitational settling occurs but is often masked by lofting due to electrostatic or mechanical forces. |
| Magnetic | Result from magnetic minerals like nano-phase iron | Particles with ferromagnetic materials | Significant for iron-rich particles | Relevant for specific mineral compositions in lunar regolith |

Understanding these unique environmental and material properties is essential to designing effective mitigation strategies. Any system intended to protect astronaut health must account for particle size, charge state, iron content, and aerodynamic persistence under low-gravity conditions. The combination of sharp geometry, variable electrostatic behavior, and magnetic adhesion makes lunar dust far more difficult to manage than Earth-based particulates.

## IV. Historical Evidence from Apollo Missions

The Apollo missions provided the first and only direct human experience with lunar dust. Despite the short duration of these missions—typically less than three days on the surface—dust quickly emerged as one of the most problematic environmental hazards. During Apollo 17, the longest surface mission, astronauts conducted three extravehicular activities (EVAs) totaling 22 hours. In that time, dust infiltrated nearly every system [1]. This is illustrated in Fig. 4.

**Fig. 4 Lunar dust covering Harrison Schmitt's EVA suit following extravehicular activity. Image source: NASA Apollo 17 imagery.**

The abrasive nature of lunar dust caused damage to hardware that was never intended to tolerate such conditions. Vacuum seals on sample containers failed, three layers of protective material on astronaut boots were worn through, and shoulder joints on EVA suits became stiff and difficult to maneuver due to accumulated grit. Virtually every surface exposed during an EVA became contaminated, and dust adhered tenaciously despite efforts to brush it off before reentry into the Lunar Module as seen in the left panel of Fig. 5. Notably, the Apollo Lunar Module did not include a true airlock. Astronauts entered directly into the main cabin through a single hatch, bringing dust in with them as observed in the right panel of Fig. 5. Once the hatch was sealed, the cabin was re-pressurized using the same internal atmosphere—which now included all the dust brought in on suits and gear.



**Fig. 5 Left: Apollo dust brush used for EVA suit cleaning prior to reentry. Right: Exterior of Apollo Lunar Module showing direct ingress/egress hatch without a true airlock. Image source: NASA, public domain.**

Inside the spacecraft, filtration systems struggled to contain the contamination. The Apollo Environmental Control System used basic filtration as shown in Fig. 6, but it was not designed for submicron dust particles. Highly abrasive and electrostatically charged grains bypassed filters and re-aerosolized, creating persistent airborne exposure. Brushing suits and wiping surfaces with cloths proved ineffective; dust simply moved around the cabin or became airborne again. Some astronauts even resorted to leaving their helmets on inside the spacecraft to avoid direct exposure.

**Fig. 6 Lunar Lander Environmental Control System including basic air filtration system. Image source: NASA Technical Paper 2006 [2].**

Despite limited medical reporting protocols at the time, several astronauts described respiratory irritation. Harrison Schmitt experienced sneezing and watery eyes and referred to the symptoms as "lunar hay fever." Pete Conrad of Apollo 12 noted that the crew opted to keep their helmets on due to visible dust in the cabin air as seen in Fig. 7. Post-mission analysis revealed that even flight surgeons who entered the command modules after splashdown reported allergic-type reactions.

**Fig. 7 Harrison Schmitt wearing helmet inside the Apollo 17 Lunar Module after EVA. Image source: NASA public domain.**

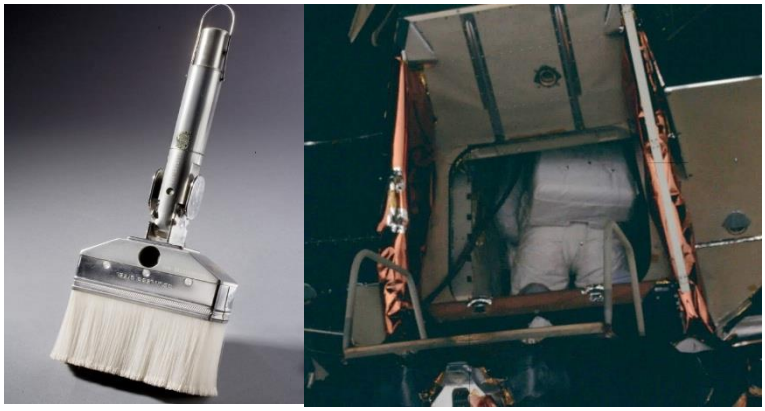These incidents underscore a critical point: if significant exposure occurred during brief missions, the risks would compound dramatically in long-duration habitats. Apollo's legacy clearly demonstrates that lunar dust is more than a nuisance—it is a systemic threat to both equipment and astronaut health that demands targeted, personal-level mitigation inside future lunar habitats.

## V. Biomedical Effects and Toxicology

While lunar dust was recognized as a respiratory irritant during the Apollo missions, the biomedical effects of exposure were never systematically studied in human subjects. For decades after Apollo, lunar dust toxicology

remained a largely underexplored field. In recent years, a small number of studies using lunar regolith simulants have attempted to quantify the biological impact of inhalation-level exposure [6, 7].

One of the key findings from these simulation studies is the size-dependent behavior of inhaled particles. Research has shown that particles smaller than 10 micrometers can penetrate deeply into the alveolar regions of the lungs, while particles smaller than 0.1 micrometers may translocate into the bloodstream and travel to secondary organs, including the brain. A 2024 study by Cui et al. used CT-based flow simulation to show that more than 50% of sub-4 μm particles deposited in the upper respiratory tract, while smaller particles migrated deeper into pulmonary airways and beyond [**4**].

In vitro studies have further demonstrated the biological consequences of this exposure. Caston (2018) exposed mammalian lung epithelial and neuronal cell cultures to sorted fractions of simulated lunar dust. Particles less than 10 μm in diameter caused marked reductions in cell viability, with <10% survival at concentrations of 20 mg/3.8 cm². Cellular damage included nuclear fragmentation, mitochondrial disruption, and evidence of oxidative stress and DNA damage [6] as presented in Fig. 8.

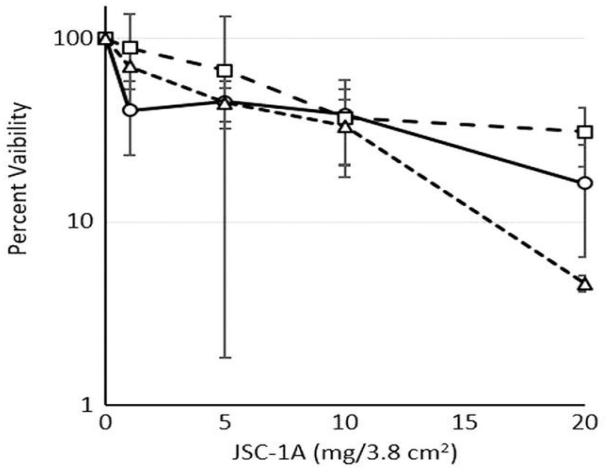


**Fig. 8 Cell viability following exposure to JSC-1A regolith simulant, sorted by particle size and applied at increasing surface concentrations. Viability decreased in a dose-dependent manner above 10 mg/3.8 cm². Each curve represents a different particle size range, with smaller particles generally associated with greater cytotoxicity. Data shown are from lab-grown mammalian cell cultures. Image source: NASA Technical Report by Caston [6], public domain.**

In vivo animal studies have also revealed the potential for lunar dust to initiate systemic inflammation. Rask (2009) and Oberdörster (2004) reported that ultrafine particles can bypass the alveolar–capillary barrier and enter the bloodstream or alternatively translocate directly into the central nervous system via the olfactory nerve pathway, with deposition observed in the olfactory bulb [7, 8].

While no formal human inhalation studies have been conducted using true lunar dust, the consistency of findings across simulation platforms, cell cultures, and animal models suggests a credible and serious risk to astronaut health. Acute risks may include respiratory distress and airway inflammation, while chronic exposure may contribute to pulmonary fibrosis, emphysema, carcinogenic processes, and neurological impairment.

Given the extreme difficulty of replicating the charged, spiculated, and iron-rich properties of lunar dust in Earth-based test platforms, existing studies likely underestimate its true hazard. While airlocks and air handling systems are designed to limit dust entry into habitats, they cannot eliminate it entirely. Once inside, the toxic potential of respirable lunar dust becomes a critical concern. The current body of evidence, though limited, provides a clear warning: without targeted, personal-level respiratory protection, long-duration lunar missions may result in irreversible biological harm.

## VI. Terrestrial Analogs and Dust-Associated Diseases

Because true lunar dust cannot be ethically tested in humans and only limited samples exist on Earth, researchers have turned to terrestrial analogs to study inhalation risks. While it would be unethical to deliberately expose people to harmful dust like crystalline silica or volcanic ash, large-scale unintentional exposures in occupational and

environmental settings provide valuable data. The two most widely studied analogs are crystalline silica dust—commonly encountered in mining and construction—and volcanic ash, which has been analyzed extensively following major eruptions. These analogs offer important proxies for understanding chronic respiratory outcomes, particularly in real-world exposure scenarios [9].

Crystalline silica is one of the most studied airborne particulate hazards. Long-term inhalation of silica particles has been strongly linked to silicosis, chronic obstructive pulmonary disease (COPD), lung cancer, and kidney disease. An estimated 23 million workers globally are exposed to silica dust each year, with 46,000 deaths attributed to silicosis in 2016 alone. Similarly, volcanic ash has been shown to cause acute respiratory symptoms such as coughing, bronchitis, and airway inflammation, with possible long-term effects including fibrosis and chronic bronchitis. These real-world epidemiologic outcomes provide important biological validation of dust-related respiratory disease pathways [10].

However, while these analogs are chemically informative, they diverge from lunar dust into several critical physical and environmental dimensions. As summarized in Table 2, lunar dust is markedly more hazardous due to its spiculated geometry, persistent airborne behavior, and ability to retain electrostatic charge. Unlike terrestrial dust, which becomes rounded through erosion, lunar dust remains sharp-edged due to the absence of weathering. Lunar particles acquire charge from solar wind and ultraviolet exposure, and this charge can persist or fluctuate in habitat environments. In contrast, Earth-based dust is typically neutral and less adherent.

Lunar dust also contains both internal iron (e.g., FeO) and surface-bound nano-phase iron ($Fe^0$), which form during micrometeorite impact events. These iron phases enhance the dust's magnetic and oxidative properties—features do not present in most terrestrial analogs. Furthermore, under the Moon's 1/6 gravity, dust remains suspended longer and is more prone to re-aerosolization with minimal disturbance, whereas terrestrial dust settles rapidly under stronger gravity [5].

**Table 2 Comparison of lunar and terrestrial dust properties, including shape, charge behavior, and environmental interactions. Compiled from NASA and ESA dust behavior literature and presentation data.**

| "General" Comparison of Lunar and Earth-Based Dust | | |
|---|---|---|
| **Property** | **Lunar Dust*** | **Earth-Based Dust** |
| Particle Shape | Jagged, spiculated | Rounded unless freshly created |
| Electrostatic Charge | Retains charge from solar wind | Typically, uncharged |
| Gravity | Suspended longer in 1/6 gravity | Settles quickly under stronger gravity |
| Atmosphere | No atmosphere to settle dust | Atmosphere facilitates settling |
| Magnetic Properties | Contains magnetic particles | Limited magnetic properties |
| Silica Content | ~45% silica | ~5-90% depending on the product being mined (i.e., metal ores ~5-10% & sandstone/granite 70-90%)** |

While terrestrial analogs like silica and volcanic ash provide useful insights into the biological effects of fine particulate exposure, they cannot replicate the physical and environmental extremes of the lunar surface. Lunar dust behaves differently due to its sharp-edged morphology, persistent electrostatic charge, high iron content, and mobility in low gravity. These distinct properties limit the relevance of Earth-based analogs for designing effective mitigation strategies. As a result, future protective solutions must integrate lessons from terrestrial toxicology with the unique environmental challenges of the lunar surface.

## VII. Limitations of Current Mitigation Strategies

The challenge of mitigating lunar dust has long been acknowledged by NASA and the broader aerospace community. However, despite awareness of its risks since the Apollo era, little meaningful progress was made in the decades that followed. Attention shifted to low-Earth orbit operations, including the International Space Station, and to early Mars concepts, leaving lunar dust as a recognized but largely unaddressed hazard. Most current strategies

focus on protecting surface equipment and suits from contamination and on minimizing dust entry into habitats through improved airlocks and air handling systems. These efforts are built on two flawed assumptions: that dust can be completely excluded from the habitat, and that any dust that does enter poses minimal health risk. In reality, dust infiltration is inevitable, and its toxicological impact—particularly through inhalation—remains poorly mitigated. The absence of targeted, in-habitat respiratory protection represents a critical gap in current mission planning.

Modern lunar habitat concepts incorporate mitigation systems such as airlocks, HEPA filtration, and environmental control protocols to limit dust ingress. NASA's Artemis program has advanced this approach through designs including multi-stage airlocks, suitlocks, and hybrid suitport-airlock architectures. These systems aim to reduce contamination by using improved seals, dust-resistant surfaces, and electrostatic or mechanical cleaning technologies applied at the ingress interface. HEPA filters are also planned for use within the Artemis Environmental Control and Life Support Systems (ECLSS) to remove airborne particles, although their efficiency declines below 0.01 µm. Despite these advancements, none of these systems can fully eliminate dust, particularly particles that are electrostatically adhered to, embedded in suits, tools, equipment, or research samples. Even under optimal conditions, respirable particles can evade removal, become dislodged during ingress, and persist in the habitat atmosphere [11,12].

The 2021 NASA Lunar Dust Challenge was a competitive effort to spur innovation in this domain [13]. NASA awarded funding to seven university teams that proposed a range of external mitigation solutions, including:

- Electrostatic fiber-based coatings for suits
- Modular electrodynamic shields for habitat surfaces
- Cryogenic liquid droplet systems for dust removal
- Brushes and ultrasonic vibration systems for suit and panel cleaning
- Bio-inspired coatings to reduce dust adhesion

While these projects contributed valuable insights into surface-level and wearable dust mitigation (see Fig. 9), none addressed the challenge of airborne dust exposure inside habitats at the point of inhalation. The 2021 Lunar Dust Challenge was also conducted too late to influence the design or deployment of early Artemis hardware. The first Artemis lunar missions are already committed to configurations that include airlocks and HEPA filtration but lack any personal, in-habitat respiratory protection. As a result, astronauts may still face prolonged exposure to respirable dust despite systemic containment efforts.

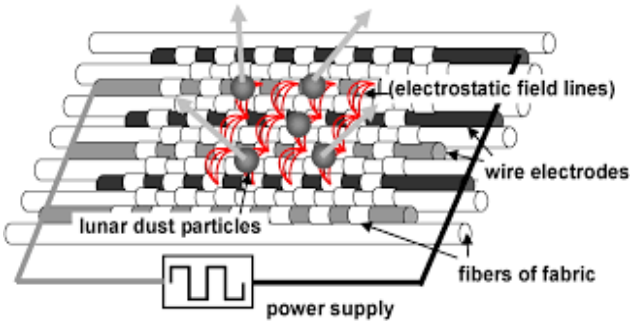


**Fig. 9 Electrostatic dust mitigation concept using interwoven wire electrodes in fabric. Alternating electric fields repel lunar dust surface particles. Image source: NASA Lunar Dust Challenge [13], public domain.**

The Apollo Program, more than 50 years ago, revealed how easily dust could infiltrate pressurized spaces, contaminate surfaces, and provoke respiratory symptoms (Figs. 1 and 7). Yet current Artemis-era planning largely continues the same assumptions: that airlocks and filtration will be sufficient. Despite growing evidence of lunar dust toxicity and known limitations of air handling systems, no personal-level respiratory protection has been proposed or prototyped for in-habitat use.

With dust infiltration inevitable and airborne exposure likely, long-duration missions require targeted protection at the point of inhalation. Addressing this operational gap demands wearable systems specifically engineered for the lunar environment.

## VIII. Inadequacy of Earth-Based Respiratory Protection

Earth-based respiratory protection systems have played a central role in industrial safety, healthcare, and hazardous materials response. However, these systems were never designed for the unique physical, environmental, and operational constraints of lunar habitation. The three most common forms of Earth-based personal protective equipment (PPE)—cloth masks, N95 respirators, and powered air-purifying respirators (PAPRs)—each have substantial limitations that render them ineffective or impractical for use in lunar habitats.

Cloth or fabric masks provide negligible protection against airborne particulates and are entirely unsuitable for lunar dust. They lack a face seal, allow air bypass, and are ineffective for particles smaller than 3–10 μm—well above the size range of most lunar dust. Such masks would be considered unsafe for any meaningful use in a lunar environment.

N95 respirators, while far more capable, also fall short. They are rated to filter 95% of particles ≥0.3 μm, but lunar dust includes a significant fraction of particles below this range. Even under ideal conditions, submicron particles may penetrate N95 filters or enter via face seal leakage [14]. More importantly, N95s are designed for short-duration, task-specific use—not continuous wear in a living environment. They are difficult to tolerate for extended periods, restrict facial communication, prevent eating and drinking, and can cause discomfort, skin irritation, and headaches during prolonged use. In a confined lunar habitat, where astronauts must breathe freely and interact fluidly over hours or days, N95s are functionally unworkable.

Powered air-purifying respirators (PAPRs) provide better filtration and face seal performance than N95s, using HEPA filters and positive-pressure airflow. HEPA filters remove 99.97% of particles ≥0.3 μm, but efficiency declines for particles smaller than 0.01 μm—a size range that includes a significant portion of lunar dust. These ultrafine particles can diffuse through filter media and bypass filtration mechanisms. Over time, filter performance degrades as sharp lunar dust clogs the system. PAPRs include full hoods and are widely used in industrial and hospital settings, but they are bulky, battery-powered, and can be hot, noisy, and isolating (see Fig. 10). While effective on Earth, they are impractical for long-duration lunar use where comfort, communication, and access to food and water are critical. Routine maintenance and battery demand further limit their suitability for space [14].

**Fig. 10 Example of a powered air-purifying respirator (PAPR) with full-face hood. Image source: Open source.**

These limitations—across cloth masks, N95s, and PAPRs—highlight a fundamental challenge: Earth-based respiratory systems are not designed for the unique hazards of lunar dust. No existing option offers continuous, comfortable protection against ultrafine, abrasive particles while allowing astronauts to eat, sleep, communicate, and function normally inside a habitat. This gap underscores the need for a purpose-built, wearable system designed specifically for in-habitat use on the Moon.

## IX. Lunar Baseball Hat – System Design and Mechanism

To address the persistent and hazardous risk of inhaling lunar dust—an issue expected to remain despite airlocks and filtration in future lunar habitats—our team developed a novel personal protective system: the Lunar Baseball Hat (see Fig. 11) [15,16]. This wearable device allows astronauts to eat, speak, rest, and interact while minimizing exposure to airborne particles. Unlike traditional respiratory equipment that relies on facial sealing or full enclosures, the system employs a multi-layered approach to protect the user's breathing zone.

**Fig. 11 Concept image of the Lunar Baseball Hat system for in-habitat respiratory protection. Image created by authors.**

The patented device, compromises a structured but wearable headpiece featuring an open face vent, integrated fan, HEPA filtration, ionization, and electrostatic dust repulsion. The external structure and form factor are shown in Fig. 12. The system is designed for minimal intrusion, offering high functionality without requiring a sealed helmet or facial covering.

**Fig. 12 Front, internal side, and rear views of the Lunar Baseball Hat design. Images created by authors.**

The protective function of the device relies on two integrated mechanisms that work in concert: (1) a mechanical system that filters, charges, and redirects clean air away from the face, and (2) an electrical system that generates an alternating electrostatic field to repel charged particles. The combined effect creates a reinforced protective zone in front of the user's face, where conditioned airflow and active electrostatic repulsion operate simultaneously to prevent dust intrusion.

For the mechanical system, air from the surrounding habitat is drawn into the device through an integrated fan positioned at the back of the hat. The air first passes through a HEPA filter, which removes 99.97% of particles $\geq 0.3$ μm. It then moves through an ionization stage, where negative ions attach to ultrafine particles that passed through the filter. Already-negative particles remain negatively charged, while neutral particles are converted to negative. Positively charged become negative after passing through the high-density ion field. The result is a stream of filtered air containing primarily negatively charged particles, routed through an internal channel and exiting through vent ports embedded in the brim as illustrated in Fig. 13. This forms a low-velocity air curtain that flows downward and outward across the user's face, physically displacing dust and delivering a shield of preconditioned air.

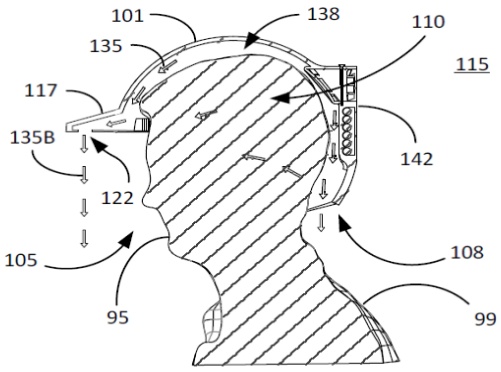


**Fig. 13 Internal airflow pathway from intake fan to brim vent ports in the Lunar Baseball Hat system. Adapted from U.S. Patent No. 12,268,267 [15].**

The electrical system compromises a series of electrodes embedded along the perimeter of the face vent (see Fig. 14). These electrodes generate a time-varying electric field using both direct and alternating current to repel charged particles near the user's face. The field is configured to deflect both negatively and positively charged dust, whether carried in the filtered airflow or suspended in the ambient cabin environment. By alternating polarity, the system continuously repels particles of either charge away from the respiratory zone.

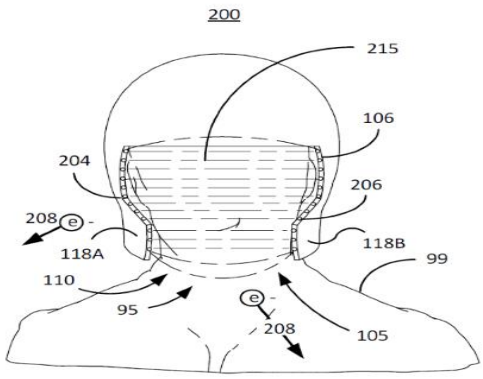


**Fig. 14 Electrode array configuration for electrostatic repulsion in the Lunar Baseball Hat system. Adapted from U.S. Patent No. 12,268,267 [15].**

The mechanical and electrical systems are designed to operate in tandem. The airflow forms a barrier of clean, negatively charged air directed away from the user's face, while the electrostatic field reinforces this barrier by actively repelling charged particles. This continuously operating system mitigates dust exposure without requiring facial sealing or restricting the wearer, enabling astronauts to function normally inside the habitat.

## X. Development Status and Path Forward

The Lunar Baseball Hat system is currently in early development, at Technology Readiness Level (TRL). Preliminary schematics and component functions have been defined, and integration of subsystems—including HEPA filtration, ionization, airflow management, and electrostatic repulsion—has been conceptually validated. Representative design elements are shown in Figs. 13 and 14.

The next phase will focus on prototyping and lab testing using simulated lunar dust. Key objectives include evaluating airflow control, curtain stability, ionization efficiency, and electrostatic repulsion in close-range particle environments. While tests can be performed in Earth-based facilities, lunar gravity effects must be modeled computationally.

Further development will assess usability factors such as wearability, airflow comfort, and face-level protection. Additional challenges include estimating charge-state distribution of dust in habitats and characterizing particle

behavior after exposure to indoor airflow and ionization. System refinement will rely on iterative testing in simulated environments as development progresses toward validation.

## XI. Earth-Based Applications

While the Lunar Baseball Hat was developed specifically for lunar habitats, it may have future applications in high-dust Earth environments such as underground mining or public exposure during volcanic events. However, it was not designed for terrestrial conditions, which involve higher gravity, predominant neutral particles, and dynamic air movement from wind and convection. Adapting the system for Earth would require further study and likely modifications to airflow, filtration, and charge management. These applications remain speculative and are outside the current development scope.

## XII. Conclusion

Lunar dust is not comparable to typical Earth-based particulate hazards. It is sharp, biologically active, and electrostatically charged, and includes a high proportion of ultrafine particles capable of penetrating deep into the lungs and crossing into the bloodstream. Even limited inhalation may result in long-term or irreversible damage to the respiratory system, and animal studies suggest the potential for neurological involvement via olfactory or circulatory pathways. This is not a nuisance-level risk, it is a serious biomedical hazard. Despite being known since Apollo, it remains largely unaddressed. Future lunar habitats must assume that some level of airborne dust contamination is inevitable, and in-habitat inhalation must be considered a mission-critical health issue.

The Lunar Baseball Hat represents a new class of in-habitat protective technology. It combines HEPA filtration, ionization, mechanical airflow, and electrostatic repulsion into a wearable system designed to actively prevent the inhalation of lunar dust without requiring a facial seal or enclosure. The system's open-face design enables continuous use during normal astronaut activities, such as eating, speaking, and sleeping—factors critical for long-duration missions.

While development is still at an early stage, this concept addresses a key operational and biomedical gap in current lunar mission planning. Continued prototyping, validation, and environmental simulation will be necessary to refine performance. If successfully implemented, this system could play a vital role in enabling safe, sustained human habitation on the Moon.

## XIII. References


[1] Cernan, G., and Davis, D., *The Last Man on the Moon*, St. Martin's Press, New York, 1999.

[2] Wagner, S., "Apollo Experience Report: Lunar Module Environmental Control System," NASA TP-2006-213726, 2006.

[3] National Research Council, *Managing the Lunar Dust Problem*, National Academy Press, Washington, D.C., 2020.

[4] Cui, X., et al., "Numerical Analysis of Lunar Dust Deposition in the Human Airway," *Journal of Hazardous Materials*, Vol. 432, 2024, pp. 1–10. https://doi.org/10.1016/j.jhazmat.2022.128704

[5] McKay, D. S., Heiken, G. H., Basu, A., Blanford, G., Simon, S., Reedy, R., French, B. M., and Papike, J., "The Lunar Regolith," in *Lunar Sourcebook: A User's Guide to the Moon*, edited by G. Heiken, D. Vaniman, and B. M. French, Cambridge University Press, New York, 1991, pp. 285–356.

[6] Caston, R., "Assessing Toxicity and DNA Damage from Lunar Regolith Simulants," NASA Technical Report, 2018.

[7] Rask, J., "Lunar Dust Toxicity: A Review," NASA Ames Research Center, 2009.

[8] Oberdörster, G., "Lung Dosimetry of Inhaled Ultrafine Particles," *Inhalation Toxicology*, Vol. 16, No. 6–7, 2004, pp. 437–445. https://doi.org/10.1080/08958370490464629

[9] International Agency for Research on Cancer (IARC), *Silica Dust and Occupational Exposure: Monograph*, Vol. 100C, World Health Organization, Geneva, 2012.

[10] U.S. Environmental Protection Agency, "Particulate Matter (PM) Basics," EPA, 2023. https://www.epa.gov/pm-pollution/particulate-matter-pm-basics

[11] NASA, "Lunar Dust Mitigation Roadmap," NASA Technical Reports Server (NTRS), 2024. https://ntrs.nasa.gov/api/citations/20240013978/downloads/NASA%20Lunar%20Dust%20Mitigation%20Roadmap%20Fall%202024.pdf

[12] Lawrence, S. J., et al., "Human Factors Considerations for Lunar Surface Missions," *Acta Astronautica*, Vol. 93, No. 1, 2014, pp. 220–227.

[13] NASA, "Lunar Dust Challenge: Solutions for Lunar Dust Mitigation," NASA Announcement, 2021. https://www.nasa.gov/directorates/spacetech/centennial_challenges/lunar_dust_challenge

[14] U.S. Centers for Disease Control and Prevention (CDC), "Guide to the Selection and Use of Particulate Respirators Certified under 42 CFR 84," NIOSH Publication 96-101, 1996. https://www.cdc.gov/niosh/docs/96-101/default.html

[15] Altshuler, K., Osabel, E., and Salvino, C., "Dust Mitigation Headgear," U.S. Patent 12/268,267, issued Apr. 8, 2025.

[16] Altshuler, K., Osabel, E., and Salvino, C., "Dust Mitigation Headgear," U.S. Patent Application 19/077,361, filed Mar. 12, 2025.